

# Bisley

## FLAME RESISTANT

TAPED ENGINEERED  
VENTED CARGO PANT

TENCATE

Tecasafe® Plus

BPC8092T

Protect your  
greatest asset...  
your workers

### INDUSTRIES

- **Oil** – Offshore exploration, petrochemical, refining and storage, upstream and downstream operations
- **Gas** – LNG & CSG, Utilities – generation, transportation, maintenance, upstream and downstream operations
- **Electrical** – Utilities – generation, transmission, distribution, maintenance, trade
- **Infrastructure** – Civil and structural works
- **Mining**

- **Inherently flame resistant** – FR properties are built in, and won't wash or wear out. Exceeds NFPA 70E and NFPA 2112 performance standards.
- **Comfortable to wear** – Soft and breathable. Superior moisture management because of special cellulosic fiber content.
- **Exceptional durability** – Outstanding abrasion resistance and better strength retention after multiple commercial washes.
- **Outstanding laundered appearance** – Fabric retains its like-new look and maintains permanent pressed appearance better than other protective fabrics.
- **Excellent value** – Long life cycle and competitive price means lowest cost.
- **Complies with industry specific Australian & International standards**



Contact your Bisley Sales Representative to find out more or call **1300 247 539**

# Bisley

## FLAME RESISTANT

### BPC8092T

#### FABRIC


- TenCate Tecasafe® Plus 700
- Arc Thermal Protection Value **ATPV 9**
- Hazard Risk Category **HRC 2**
- FR Modacrylic  
Lyocell  
Aramid
- 238 gsm

#### SIZE

- Regular 77-112
- Stout 87-107

#### COLOURS

- Navy (BPCT)

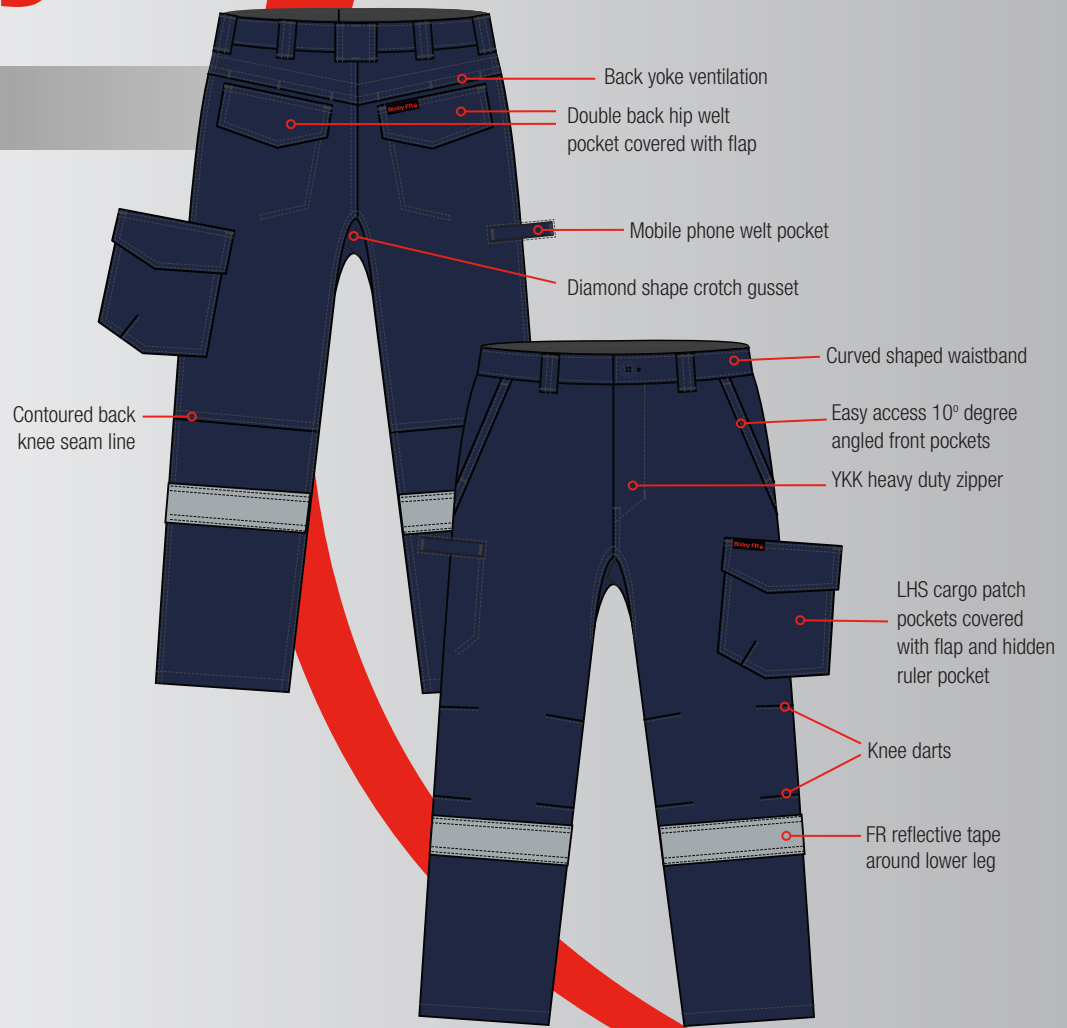

## STANDARDS COMPLIANCE

Reports Available Upon Request

#### NFPA70E: ELECTRICAL SAFETY IN THE WORKPLACE

- ASTM F 1959 / F1959M according to ASTM F1506-10a. ATPV 9.0cal/cm<sup>2</sup> HRC2

#### NFPA2112: FLAME RESISTANT GARMENTS FOR PROTECTION OF INDUSTRIAL PERSONNEL AGAINST FLASH FIRE

- ASTM F1930:2012 Flash Fire Exposure (% body burn [2 cal/cm<sup>2</sup>/sec] @ 3 sec) 15%
- ASTM D6413 / D6413M-13a Vertical Flame Test

#### ISO11612: PROTECTIVE CLOTHING AGAINST HEAT AND FLAME

#### AS/NZS 4399:1999: SUN PROTECTIVE CLOTHING - EVALUATION AND CLASSIFICATION

This garment has a sun protection rating of UPF 50+ for all colours

#### AS/NZS 4602.1:2011: HI VISIBILITY SAFETY GARMENTS. GARMENTS FOR HIGH RISK APPLICATION

This garment is classified as Class N under this standard. A garment designed for night use using retro-reflective tape at legs. Under section 7.1 of this standard, Class N garments are intended to provide wearer with high visibility at night when viewed under retro-reflected light.

The Retro-reflective material used in this garment meets the specific requirements of AS/NZS 1906.4 for Class R material.

#### ALL BISLEY GARMENTS COMPLY WITH CARE LABELLING STANDARDS:

- **AS/NZS 2621:1998:** Textiles - Guide to the Selection of Correct Care Labelling Instructions from AS/NZS 1957
- **AS/NZS 2392:1999:** Textiles - Labelling of Clothing, Household Textiles and Furnishings
- **AS/NZS 1957:1998:** Textiles - Care Labelling
- **AS/NZS 2622:1996:** Textile Products - Fibre Content Labelling